

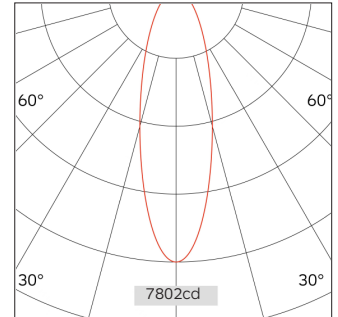


52.07529 FLEXI Recessed Downlight

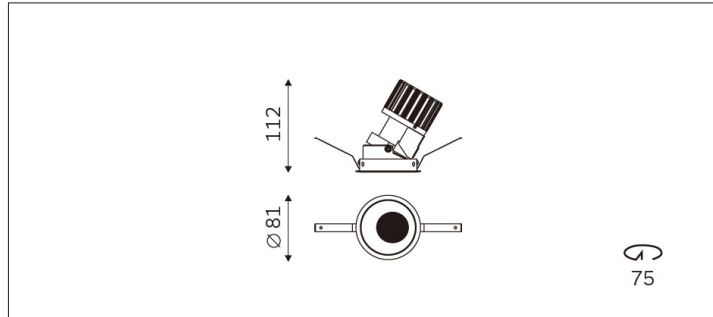

| | |
|--------------------------------|--------------------------|
| Light Distribution | FLEXI Recessed Downlight |
| Colour Temperature | 2700/3000/3500/4000K |
| Colour Rendition Index | CRI 90 |
| Optics | Lens |
| Beam Angle | 19D/29D/40D/50D |
| Cut Out | 75mm |
| Connected Load | 15W |
| Luminous Flux Of The Luminaire | 1528lm |
| Luminaire Efficacy | 103m/W |
| Colour Deviation | SDCM < 5 |
| Light Source | LED |
| LED Type | COB |
| Dimming Method | Triac/0-10V/ Dali |
| Cover Material | Aluminum |
| Body Material | Aluminum |
| IP Rating | IP20 |
| Housing Colour | Sandy White/ Sandy Black |
| Weight | 0.4Kg |
| Technical Region | 220-240V 50/60Hz |

Light Beam Table

| H(m) | E(lx) | D(m) |
|------|---------|------|
| | | 19° |
| 1.0 | 7802.31 | 0.33 |
| 2.0 | 1950.58 | 0.66 |
| 3.0 | 866.92 | 0.99 |
| 4.0 | 487.64 | 1.31 |
| 5.0 | 312.09 | 1.64 |

This recessed LED downlight is perfect for accent lighting in showrooms, galleries, museums, brand display areas, and designer studios. Available in multiple beam angles and color temperatures (2700K/3000K/4000K), it provides precise lighting control to enhance the display effect and highlight featured areas.