
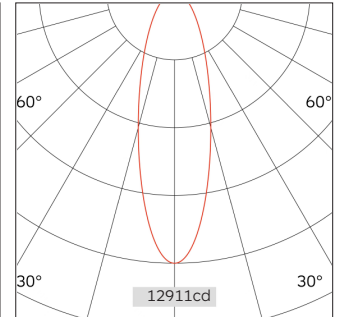


61.02375 MAGENTRA Low Voltage Linear Light

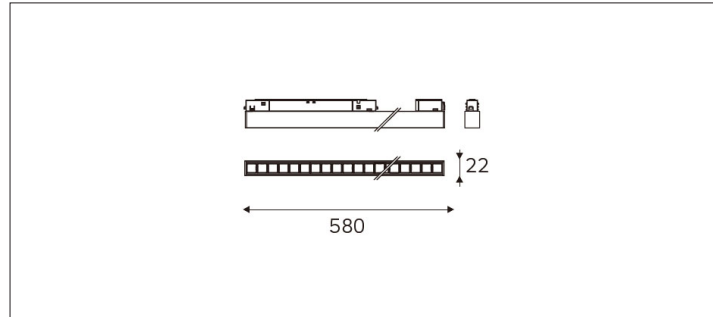

Connected Load	29W
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	LENS
Beam Angle	27D/36D/50D/69D
Track	Low Voltage Track
Light Distribution	Magenta Linear Lighting
Luminous Flux Of The Luminaire	2817lm
Luminaire Efficacy	97lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	SMD
Dimming Method	1-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Matt White/ Matt Black
Weight	0.4Kg
Technical Region	Input 48V

Light Beam Table

H(m)	E(lx)	D(m)
		27°
1.0	12911.16	0.48
2.0	3227.79	0.97
3.0	1434.57	1.45
4.0	806.95	1.93
5.0	516.45	2.42

Ideal for retail and commercial spaces with height limitations or highlight display needs: fashion boutiques, home furnishing stores, branded chain stores, vehicle exhibitions, jewelry and accessory counters, upscale hotels, museums, showroom halls, display windows, and other precision lighting areas.