
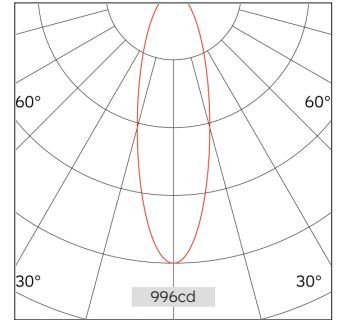
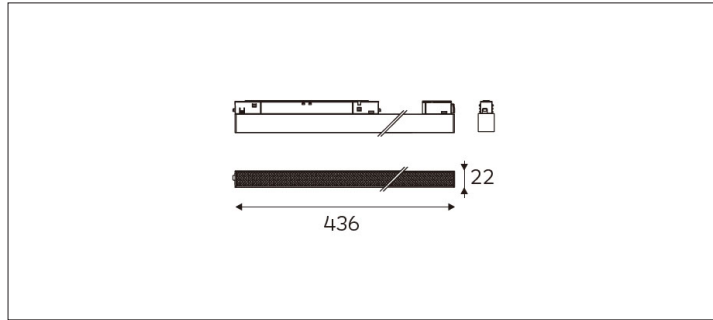


61.02357 MAGENTRA Low Voltage Linear Lighting



Connected Load	20W
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	PC Cover
Beam Angle	wide flood 90°
Track	Low Voltage Track
Light Distribution	MAGENTRA Linear Lighting
Luminous Flux Of The Luminaire	1831lm
Luminaire Efficacy	93lm/W
Colour Deviation	SDCM <5
Light Source	LED
LED Type	SMD
Dimming Method	1-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Matt White/ Matt Black
Weight	0.5Kg
Technical Region	Input 48V

Light Beam Talbe		
h(m)	E(lx)	D(m)
		90°
1.0	996.14	1.82
2.0	249.04	3.63
3.0	110.68	5.45
4.0	62.26	7.26
5.0	39.85	9.08

Widely used in commercial applications including fashion stores, furniture exhibitions, branded boutiques, vehicle display halls, jewelry galleries, high-end hotels, retail chains, museums, display windows, checkout counters, and other areas needing focused accent lighting.