
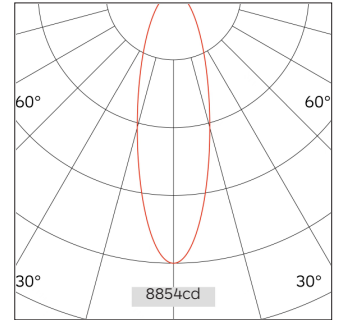


61.02360 MAGENTRA Low Voltage Linear Light

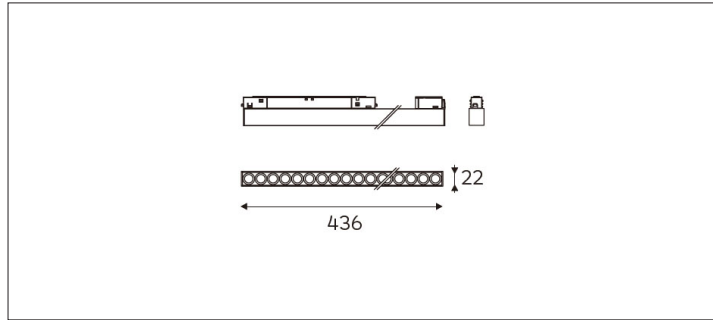

Connected Load	20W
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	LENS
Beam Angle	21D/29D/41D
Track	Low Voltage Track
Light Distribution	Magenta Linear Lighting
Luminous Flux Of The Luminaire	2041lm
Luminaire Efficacy	102lm/W
Colour Deviation	SDCM<5
Light Source	LED
LED Type	SMD
Dimming Method	1-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Matt White/ Matt Black
Weight	0.4Kg
Technical Region	Input 48V

Light Beam Table

H(m)	E(lx)	D(m)
		21°
1.0	8854.13	0.38
2.0	2213.53	0.76
3.0	983.79	1.14
4.0	553.38	1.52
5.0	354.17	1.90

Ideal for retail and commercial spaces with height limitations or highlight display needs: fashion boutiques, home furnishing stores, branded chain stores, vehicle exhibitions, jewelry and accessory counters, upscale hotels, museums, showroom halls, display windows, and other precision lighting areas.