

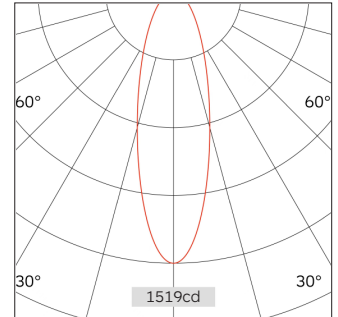


62.02513 SPECTRUM Track Lighting

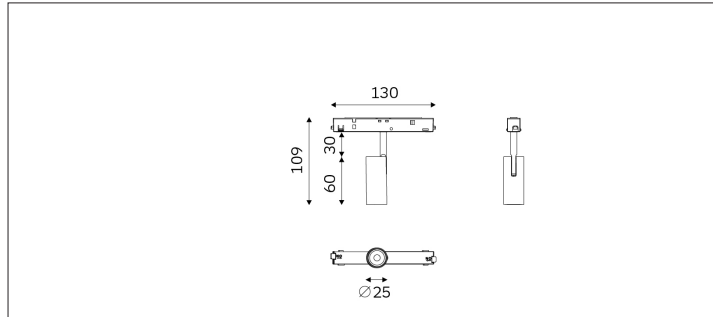

Connected Load	3.8W
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	LENS
Beam Angle	17D/26D/31D/53D
Track	Low Voltage Track
Light Distribution	SPECTRUM Track Lighting
Luminous Flux Of The Luminaire	197lm
Luminaire Efficacy	52lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	SMD
Dimming Method	1-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.25Kg
Technical Region	Input 48V

Light Beam Talbe		
h(m)	E(lx)	D(m)
		17°
1.0	1519	0.30
2.0	379	0.60
3.0	168	0.90
4.0	94	1.20
5.0	60	1.50

It is an individual solution with a high degree of flexibility. all inserts are mounted completely without tools and held within the profile by a magnetic force. With just one flick of the wrist, you can adjust the inserts as needed at any time to set the scene for your desired object. Application areas: residential, hotel, restaurants, retail and other high-end places.