

Report No.:

Test Time: 2025-10-08 15:11

Luminaire Property

Luminaire Manufacturer:

Luminaire Description: 60D

Luminous Width (mm): -96

Current: 0.174 A

Power Factor: 0.983

Luminous Length (mm): -96

Voltage: 224.7 V

Power: 38.60 W

Photometric Results

CIE Class: Direct

Measurement Flux: 4967.3 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H67.5

Vertical Diffuse Angle(50%): V67.5

Luminaire Efficacy Rating (LER): 128.74

Max. Intensity: 4599.09 cd

S/MH(C0/C180): 1.07

Total Rated Lamp Lumens: 4967.3 lm

Efficiency: 100%

Upward Ratio: 0%

Central Intensity: 4552.75 cd


Pos of Max. Intensity: H180 V7

S/MH(C90/C270): 1.07

Picture Of Luminaire



Luminous Intensity Distribution Curve

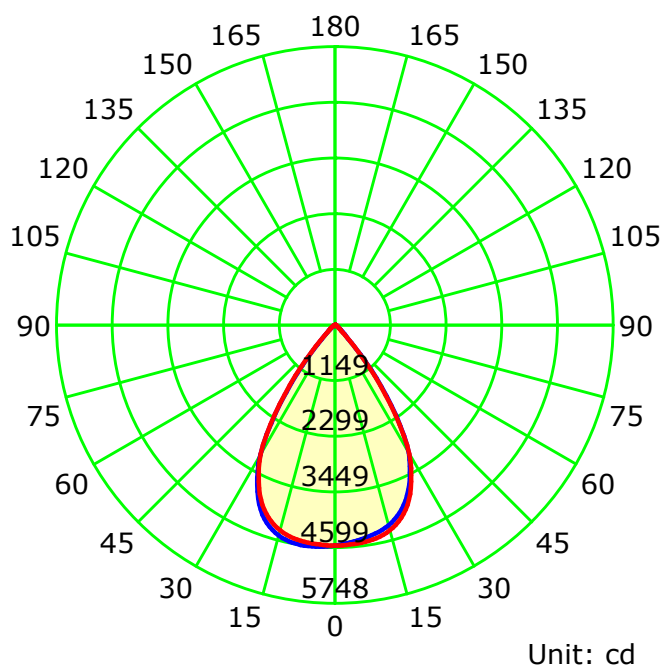

— C0-C180 — C90-C270

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: CHL-6E

Distance: 2.905 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

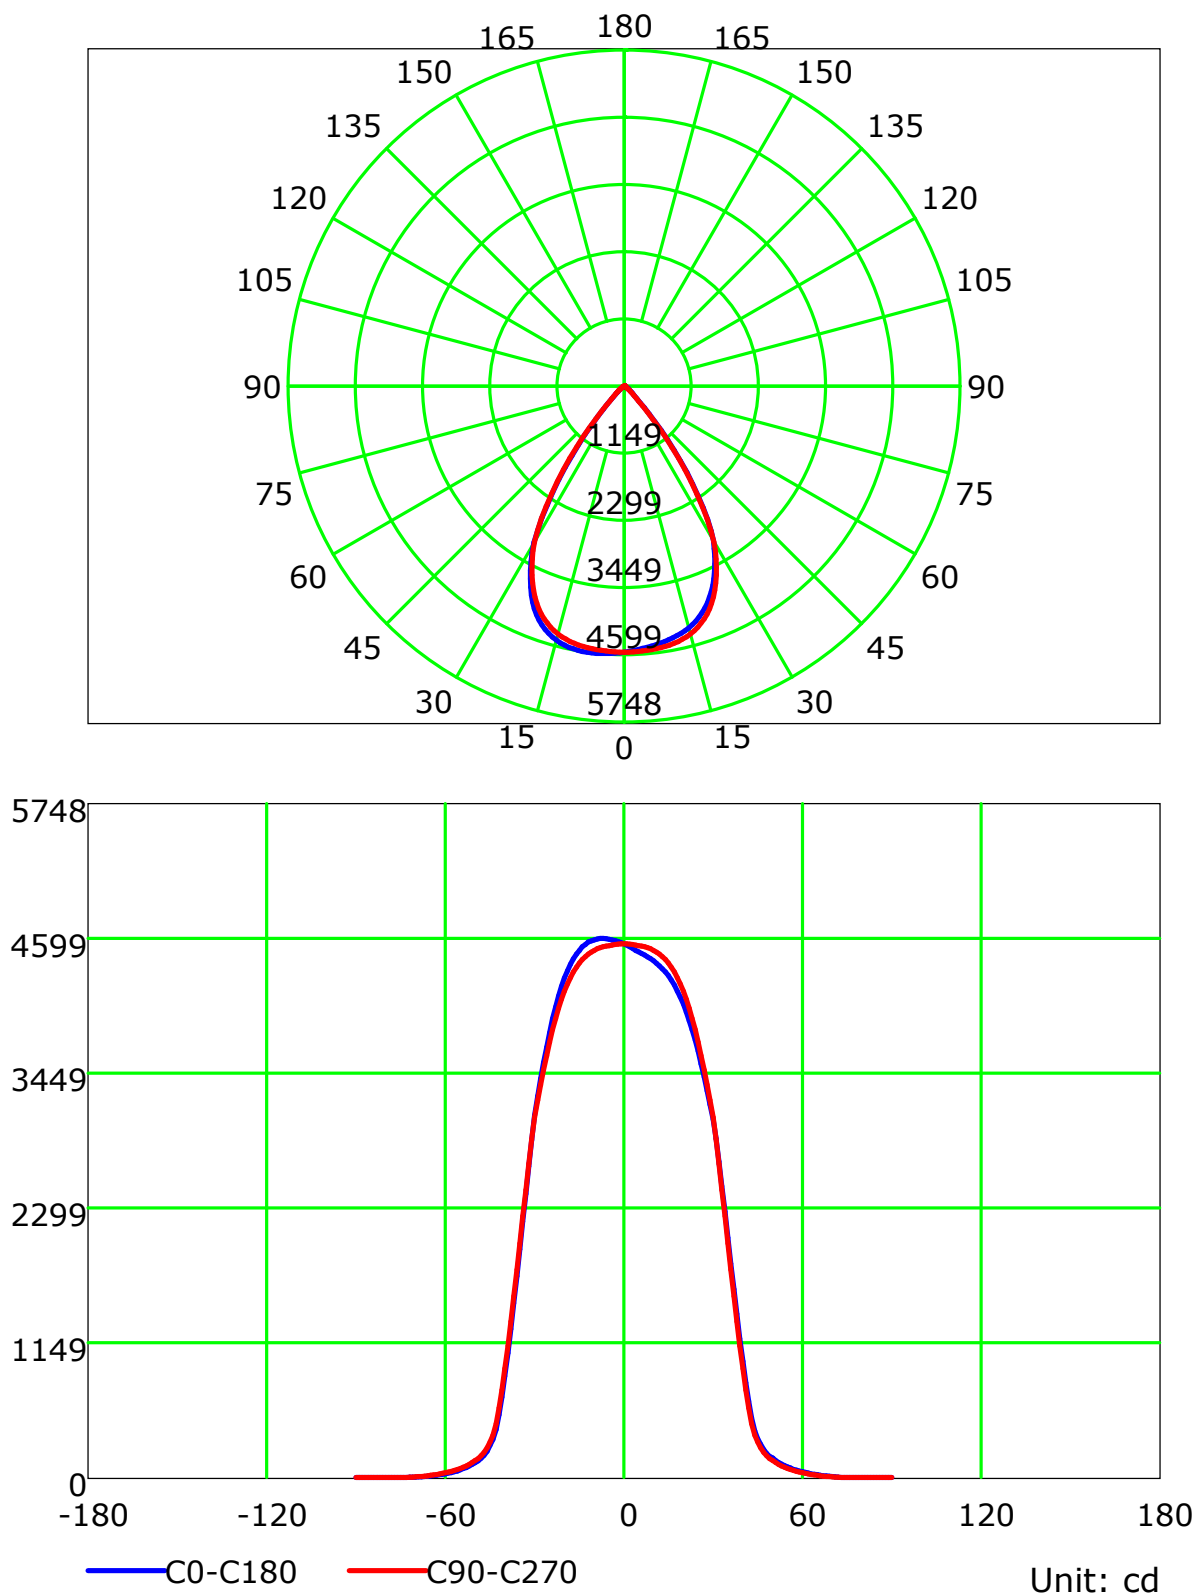

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:


Luminous Intensity Distribution Curve(cd/klm)

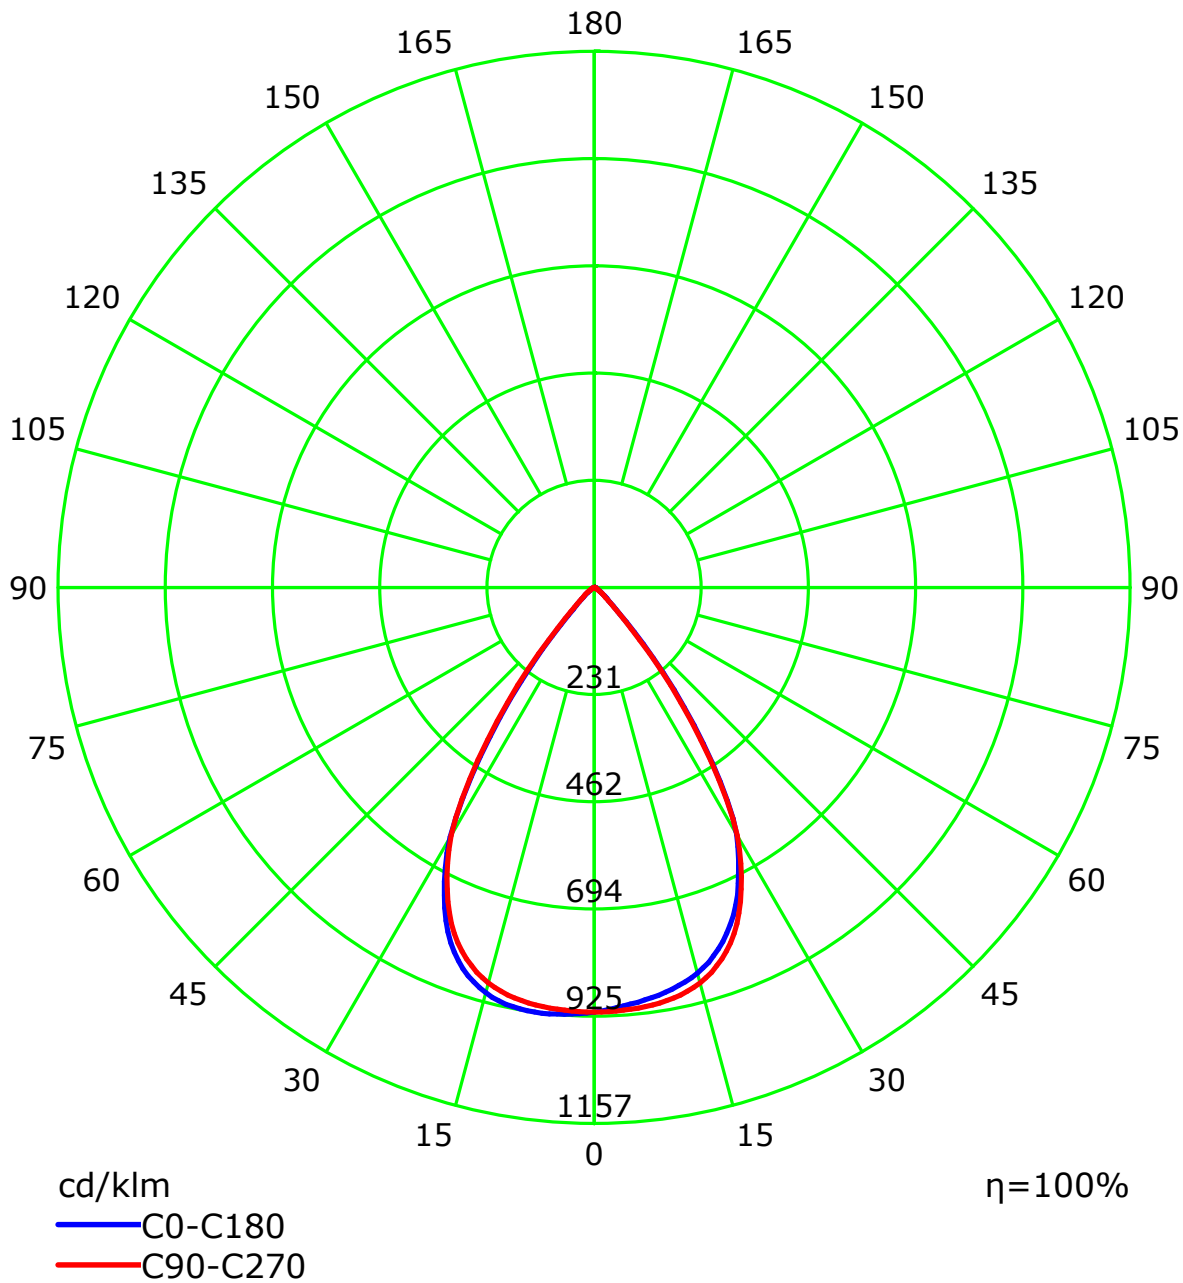

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Isocandela (rectangle)

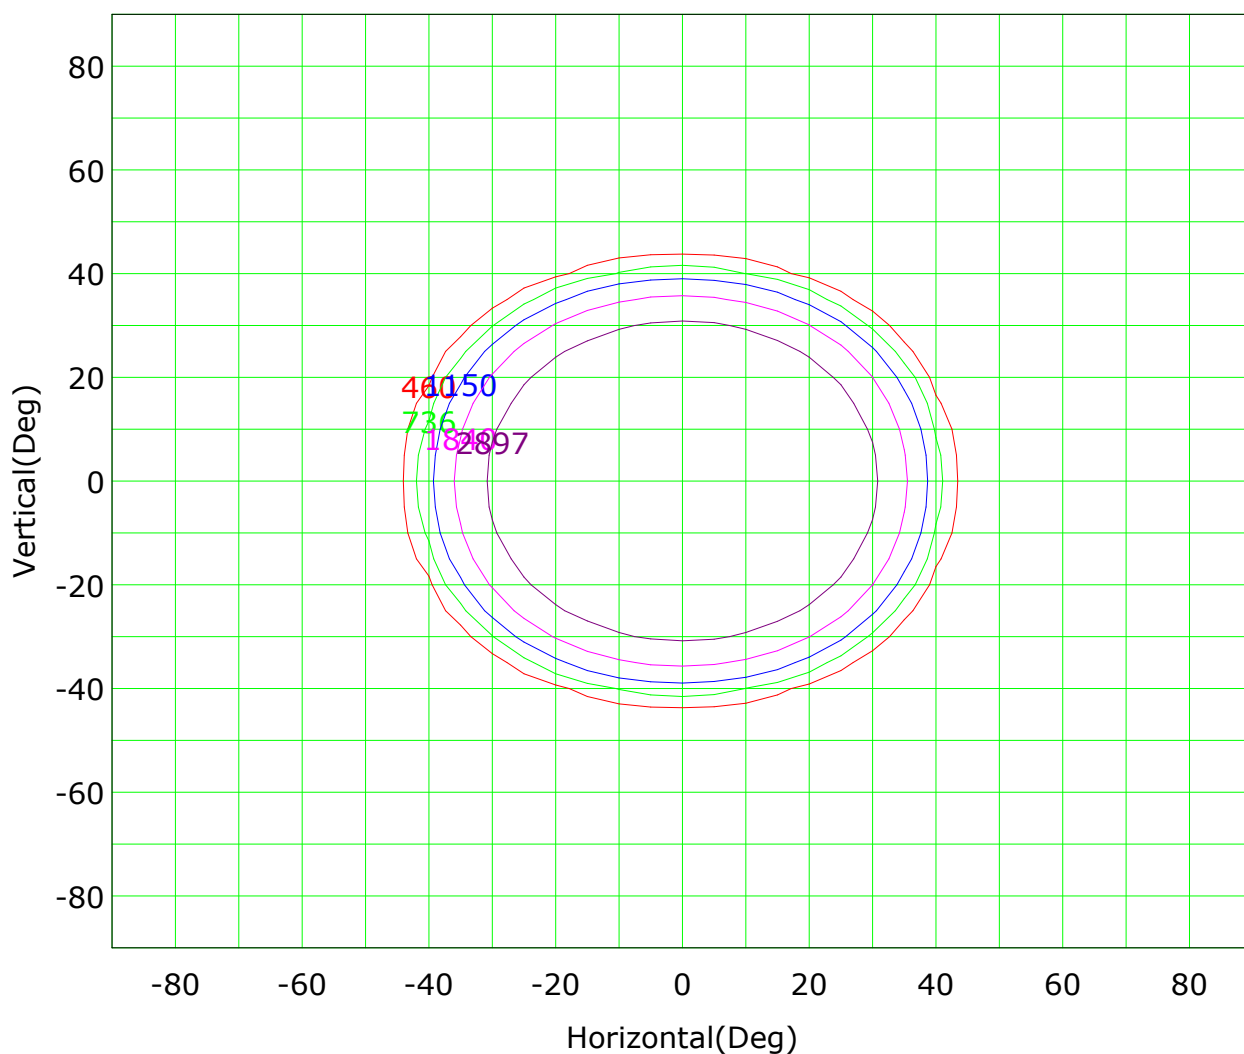

Imax (100%): 4599 cd

| | |
|-----------------|-----------------|
| (10%): 460 cd | (16%): 736 cd |
| (25%): 1150 cd | (40%): 1840 cd |
| (63%): 2897 cd | (100%): 4599 cd |

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: CHL-6E

Distance: 2.905 m

Humidity:

Inspector:

IsoLux Plot

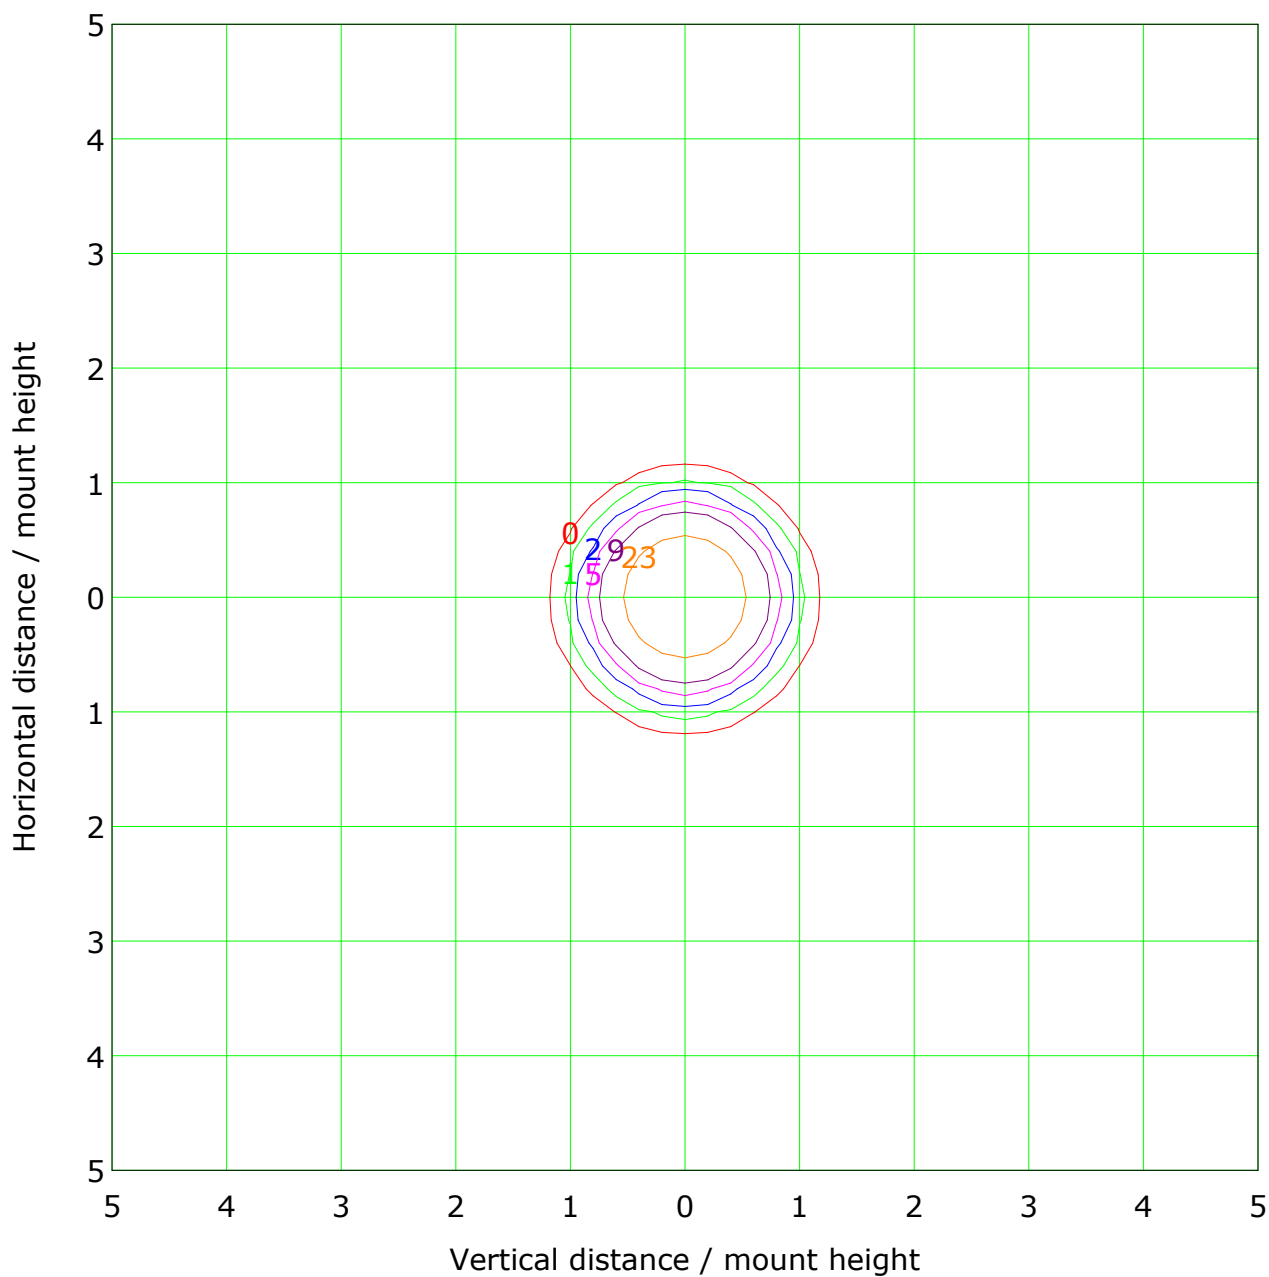

Mounting Height: 10.0m Max Lux(100%): 45.6 lx

| | |
|-----------------|-----------------|
| (1%): 0.5 lx | (2%): 0.9 lx |
| (5%): 2.3 lx | (10%): 4.6 lx |
| (20%): 9.1 lx | (50%): 22.8 lx |
| (100%): 45.6 lx | |

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: CHL-6E

Distance: 2.905 m


Humidity:

Inspector:

Illuminance at a Distance

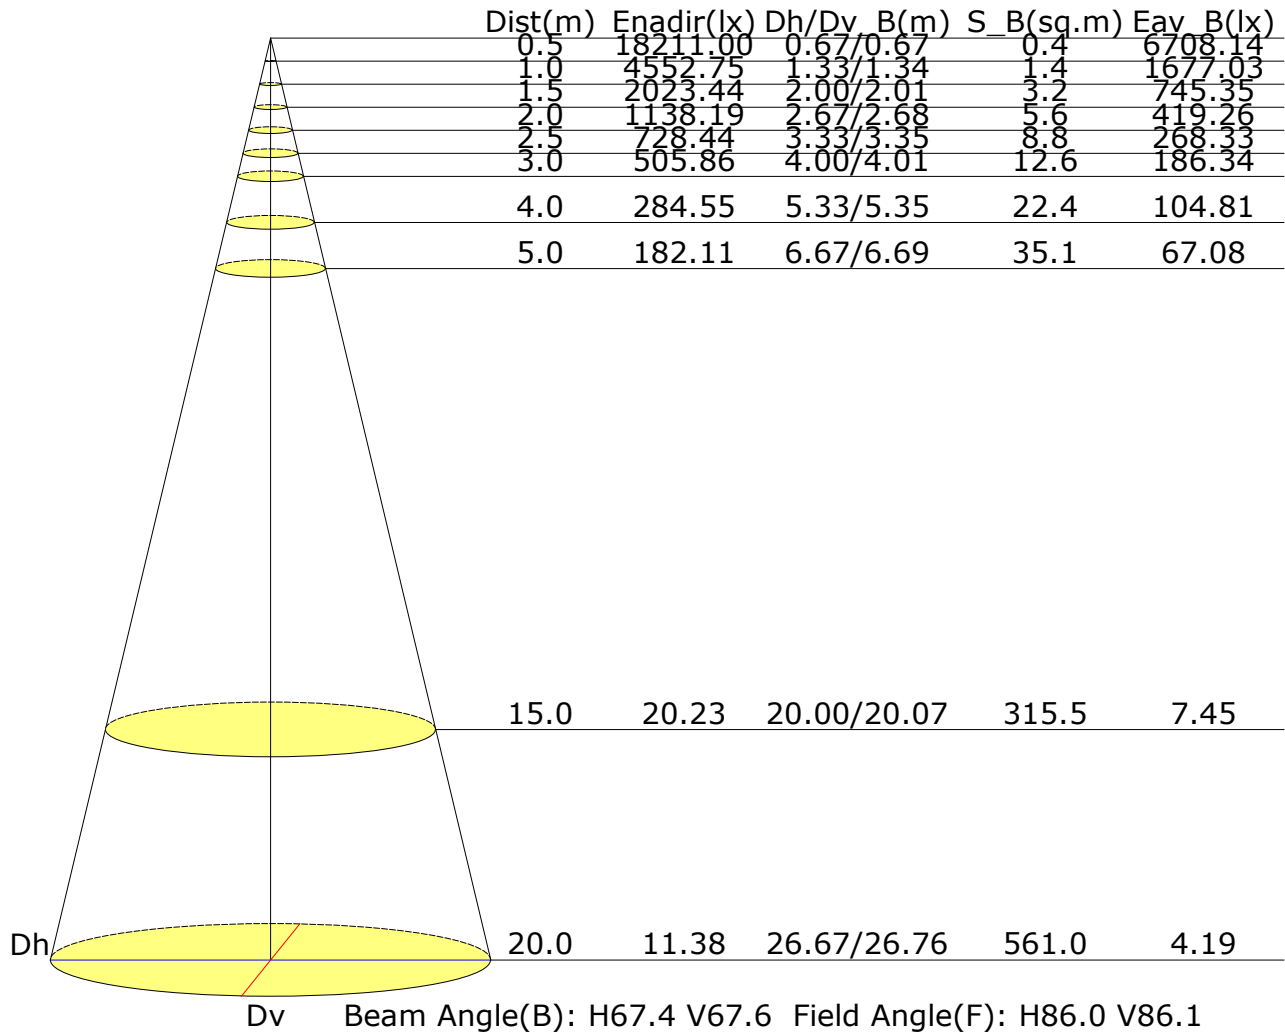

Vertical IsoLux Plot

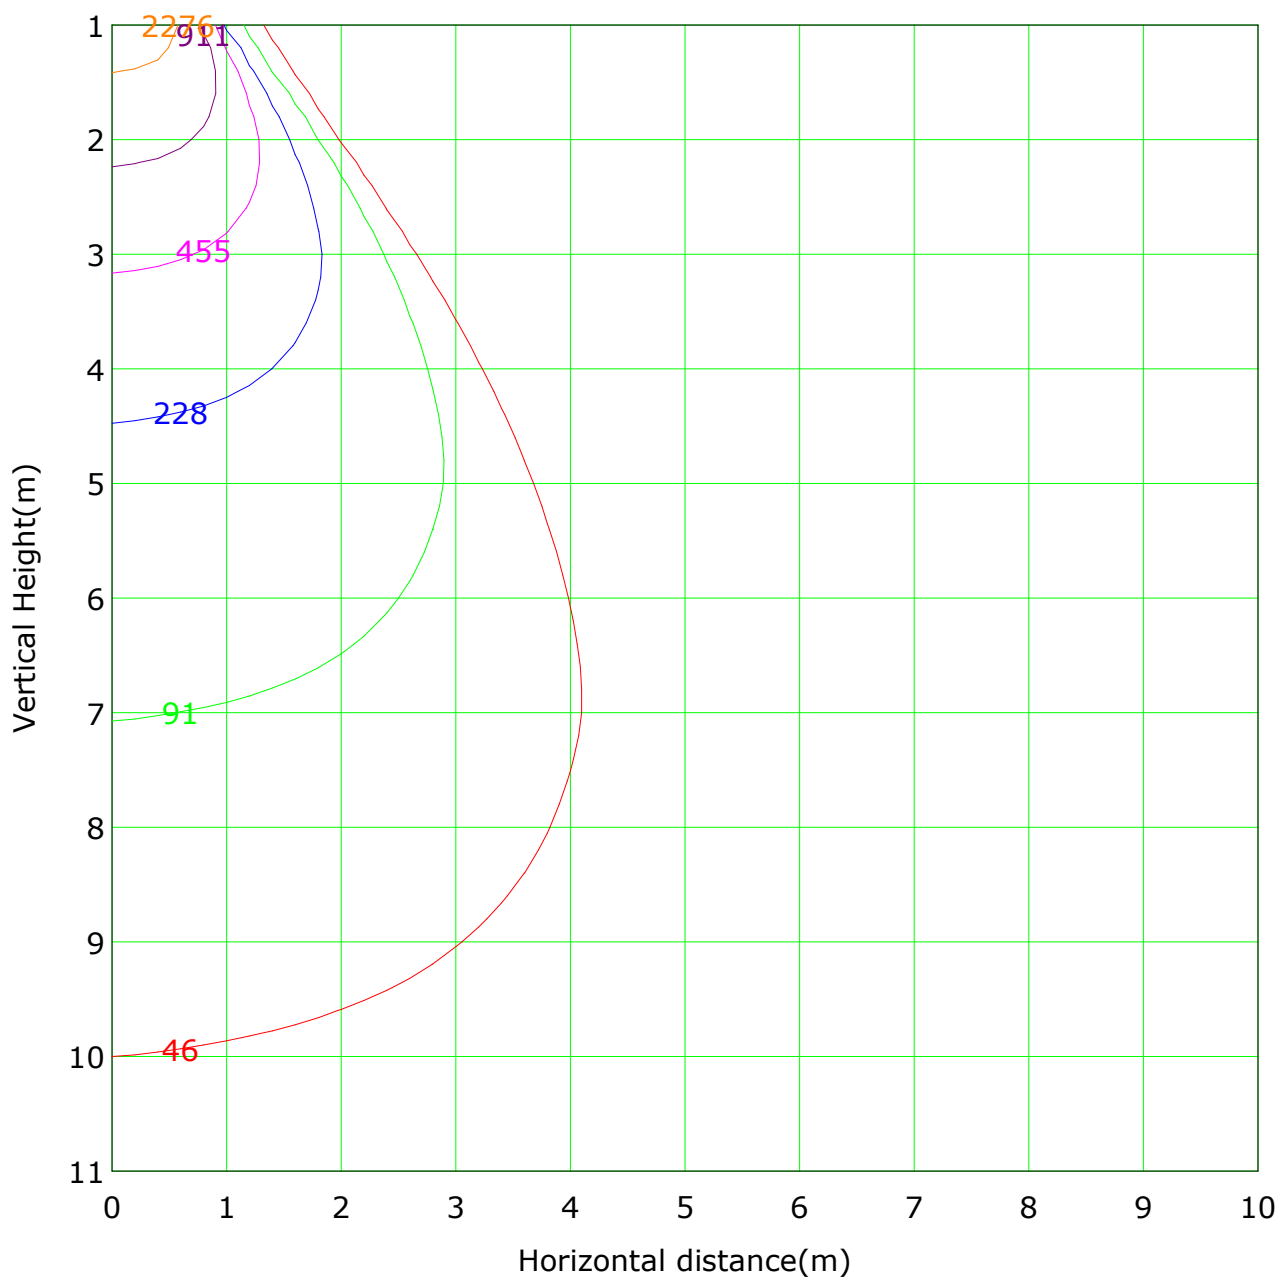


Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 4552.8 lx
 (1%): 45.5 lx (2%): 91.1 lx
 (5%): 227.6 lx (10%): 455.3 lx
 (20%): 910.5 lx (50%): 2276.4 lx
 (100%): 4552.8 lx

C Plane (°): 0.0-180.0: 180.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°): 0.0-90.0: 1.0
 Test Device: CHL-6E
 Distance: 2.905 m
 Humidity:
 Inspector:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

The Average Illuminance Effective Figure

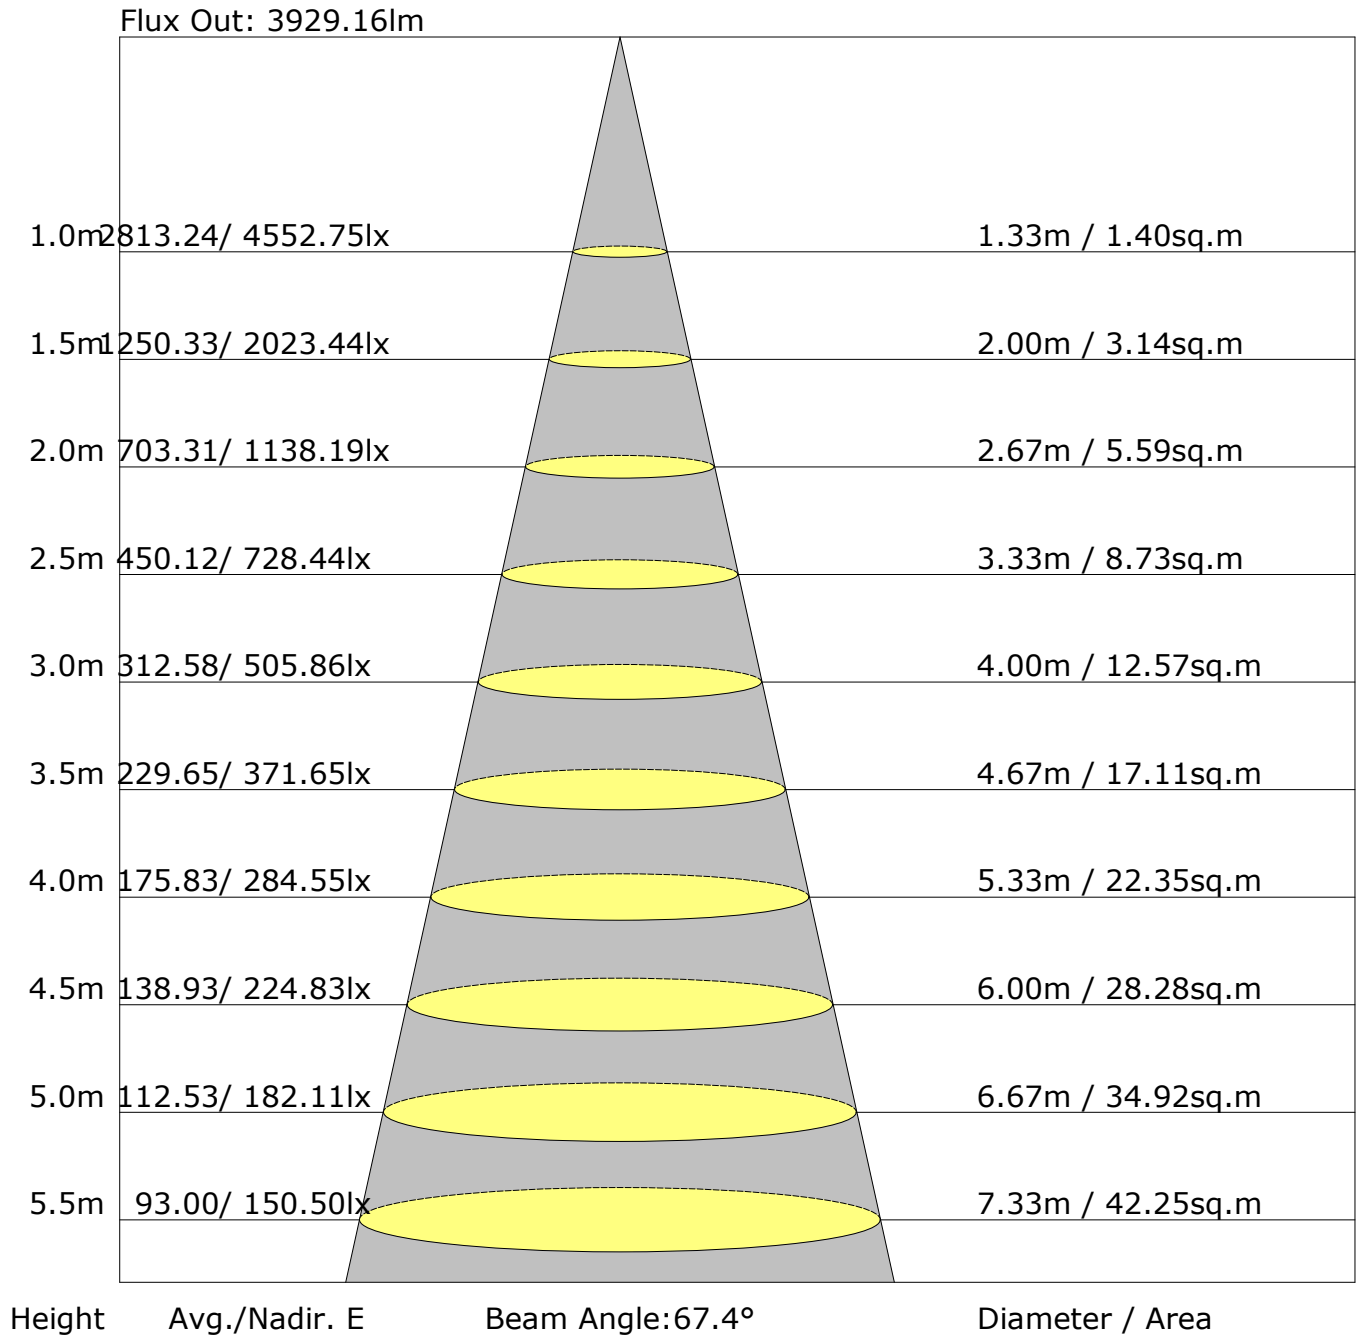

UGR Table

| | | | | | | | | | | |
|--|------------------|------|------|------|------|----------------|------|------|------|------|
| Reflectance: | | | | | | | | | | |
| Ceiling (cavity) | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 |
| Wall | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 |
| Reference plane | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 |
| Room dimensions | Viewed crosswise | | | | | Viewed endwise | | | | |
| X=2H Y=2H | 24.3 | 25.2 | 24.5 | 25.4 | 25.6 | 24.1 | 25.0 | 24.4 | 25.2 | 25.5 |
| 3H | 24.1 | 25.0 | 24.4 | 25.2 | 25.4 | 24.0 | 24.8 | 24.3 | 25.1 | 25.3 |
| 4H | 24.1 | 24.8 | 24.4 | 25.1 | 25.4 | 23.9 | 24.7 | 24.2 | 24.9 | 25.2 |
| 6H | 24.0 | 24.7 | 24.3 | 25.0 | 25.3 | 23.9 | 24.6 | 24.2 | 24.8 | 25.1 |
| 8H | 24.0 | 24.6 | 24.3 | 24.9 | 25.2 | 23.8 | 24.5 | 24.2 | 24.8 | 25.1 |
| 12H | 23.9 | 24.6 | 24.3 | 24.9 | 25.2 | 23.8 | 24.4 | 24.1 | 24.7 | 25.1 |
| X=4H Y=2H | 24.1 | 24.8 | 24.4 | 25.1 | 25.4 | 23.9 | 24.7 | 24.3 | 25.0 | 25.2 |
| 3H | 23.9 | 24.6 | 24.3 | 24.9 | 25.2 | 23.8 | 24.4 | 24.2 | 24.8 | 25.1 |
| 4H | 23.9 | 24.4 | 24.2 | 24.8 | 25.1 | 23.7 | 24.3 | 24.1 | 24.6 | 25.0 |
| 6H | 23.8 | 24.3 | 24.2 | 24.7 | 25.0 | 23.6 | 24.1 | 24.1 | 24.5 | 24.9 |
| 8H | 23.7 | 24.2 | 24.2 | 24.6 | 25.0 | 23.6 | 24.1 | 24.0 | 24.4 | 24.9 |
| 12H | 23.7 | 24.1 | 24.1 | 24.5 | 24.9 | 23.6 | 24.0 | 24.0 | 24.4 | 24.8 |
| X=8H Y=4H | 23.7 | 24.2 | 24.2 | 24.6 | 25.0 | 23.6 | 24.1 | 24.0 | 24.4 | 24.9 |
| 6H | 23.7 | 24.0 | 24.1 | 24.4 | 24.9 | 23.5 | 23.9 | 24.0 | 24.3 | 24.8 |
| 8H | 23.6 | 23.9 | 24.1 | 24.4 | 24.9 | 23.5 | 23.8 | 23.9 | 24.2 | 24.7 |
| 12H | 23.6 | 23.8 | 24.1 | 24.3 | 24.8 | 23.4 | 23.7 | 23.9 | 24.2 | 24.7 |
| X=12H Y=4H | 23.7 | 24.1 | 24.1 | 24.5 | 24.9 | 23.6 | 24.0 | 24.0 | 24.4 | 24.8 |
| 6H | 23.6 | 23.9 | 24.1 | 24.4 | 24.9 | 23.5 | 23.8 | 23.9 | 24.2 | 24.7 |
| 8H | 23.6 | 23.8 | 24.1 | 24.3 | 24.8 | 23.4 | 23.7 | 23.9 | 24.2 | 24.7 |
| Variations with the observer position at spacings: | | | | | | | | | | |
| S=1.0H | +4.8/-9.4 | | | | | +4.9/-10.0 | | | | |
| S=1.5H | +7.5/-12.7 | | | | | +7.6/-13.4 | | | | |
| S=2.0H | +9.5/-16.7 | | | | | +9.6/-17.6 | | | | |

Calculate in accordance with CIE Pub.117. The table is revised with 4967lm ($8\log(F/F_0) = 5.6$).

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

| | ZONE | LUMENS | % LAMP LUMENS |
|--|----------------|--------|---------------|
| | FORWARD LIGHT | 2484 | 50.0 |
| | FL (0°-30°) | 1659 | 33.4 |
| | FM (30°-60°) | 812 | 16.4 |
| | FH (60°-80°) | 12 | 0.3 |
| | FVH (80°-90°) | 0 | 0.0 |
| | BACK LIGHT | 2484 | 50.0 |
| | BL (0°-30°) | 1694 | 34.1 |
| | BM (30°-60°) | 779 | 15.7 |
| | BH (60°-80°) | 10 | 0.2 |
| | BVH (80°-90°) | 0 | 0.0 |
| | UP LIGHT | 0 | 0.0 |
| | UL (90°-100°) | 0 | 0.0 |
| | UH (100°-180°) | 0 | 0.0 |
| | TRAPPED LIGHT | NA | NA |

| BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07 | |
|--|----------|
| Asymmetrical Luminaire Types (Type I,II,III,IV) | B3 U0 G0 |
| Quadrilateral Symmetrical Luminaire Types (Type V,Area Light) | B3 U0 G0 |

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Zonal Lumen

| Gamma [°] | I _{mean} [cd] | Zonal Flux [lm] | Sum Zonal Flux [lm] | Rel Zonal Flux [%] | Sum Rel Zonal Flux [%] |
|--------------|---------------------------|--------------------|------------------------|-----------------------|---------------------------|
| 0.0-1.0 | 4553.5 | 4.4 | 4.4 | 0.09 | 0.09 |
| 1.0-2.0 | 4552.4 | 13.1 | 17.4 | 0.26 | 0.35 |
| 2.0-3.0 | 4549.2 | 21.8 | 39.2 | 0.44 | 0.79 |
| 3.0-4.0 | 4545.4 | 30.4 | 69.6 | 0.61 | 1.40 |
| 4.0-5.0 | 4540.8 | 39.1 | 108.7 | 0.79 | 2.19 |
| 5.0-6.0 | 4537.0 | 47.7 | 156.4 | 0.96 | 3.15 |
| 6.0-7.0 | 4531.7 | 56.3 | 212.6 | 1.13 | 4.28 |
| 7.0-8.0 | 4524.7 | 64.8 | 277.4 | 1.30 | 5.58 |
| 8.0-9.0 | 4516.6 | 73.2 | 350.6 | 1.47 | 7.06 |
| 9.0-10.0 | 4505.0 | 81.5 | 432.1 | 1.64 | 8.70 |
| 10.0-11.0 | 4490.6 | 89.7 | 521.9 | 1.81 | 10.51 |
| 11.0-12.0 | 4475.2 | 97.8 | 619.7 | 1.97 | 12.48 |
| 12.0-13.0 | 4455.9 | 105.8 | 725.5 | 2.13 | 14.61 |
| 13.0-14.0 | 4433.0 | 113.5 | 839.0 | 2.28 | 16.89 |
| 14.0-15.0 | 4406.0 | 121.0 | 959.9 | 2.44 | 19.33 |
| 15.0-16.0 | 4373.0 | 128.2 | 1088.1 | 2.58 | 21.90 |
| 16.0-17.0 | 4334.7 | 135.0 | 1223.1 | 2.72 | 24.62 |
| 17.0-18.0 | 4289.4 | 141.4 | 1364.5 | 2.85 | 27.47 |
| 18.0-19.0 | 4238.5 | 147.5 | 1512.0 | 2.97 | 30.44 |
| 19.0-20.0 | 4181.7 | 153.1 | 1665.1 | 3.08 | 33.52 |
| 20.0-21.0 | 4116.4 | 158.1 | 1823.2 | 3.18 | 36.70 |
| 21.0-22.0 | 4043.0 | 162.5 | 1985.7 | 3.27 | 39.97 |
| 22.0-23.0 | 3961.2 | 166.2 | 2151.9 | 3.35 | 43.32 |
| 23.0-24.0 | 3870.3 | 169.2 | 2321.1 | 3.41 | 46.73 |
| 24.0-25.0 | 3769.5 | 171.4 | 2492.6 | 3.45 | 50.18 |
| 25.0-26.0 | 3658.2 | 172.7 | 2665.3 | 3.48 | 53.66 |
| 26.0-27.0 | 3539.2 | 173.2 | 2838.4 | 3.49 | 57.14 |
| 27.0-28.0 | 3415.6 | 173.0 | 3011.4 | 3.48 | 60.62 |
| 28.0-29.0 | 3286.4 | 172.0 | 3183.4 | 3.46 | 64.09 |
| 29.0-30.0 | 3146.7 | 169.9 | 3353.3 | 3.42 | 67.51 |
| 30.0-31.0 | 2980.3 | 165.9 | 3519.2 | 3.34 | 70.85 |
| 31.0-32.0 | 2782.3 | 159.4 | 3678.6 | 3.21 | 74.06 |
| 32.0-33.0 | 2566.0 | 151.2 | 3829.8 | 3.04 | 77.10 |
| 33.0-34.0 | 2341.7 | 141.7 | 3971.5 | 2.85 | 79.95 |
| 34.0-35.0 | 2113.1 | 131.3 | 4102.7 | 2.64 | 82.59 |
| 35.0-36.0 | 1885.3 | 120.1 | 4222.8 | 2.42 | 85.01 |

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Zonal Lumen (Continue 1)

| Gamma [°] | I _{mean} [cd] | Zonal Flux [lm] | Sum Zonal Flux [lm] | Rel Zonal Flux [%] | Sum Rel Zonal Flux [%] |
|--------------|---------------------------|--------------------|------------------------|-----------------------|---------------------------|
| 36.0-37.0 | 1660.6 | 108.3 | 4331.1 | 2.18 | 87.19 |
| 37.0-38.0 | 1440.5 | 96.2 | 4427.3 | 1.94 | 89.13 |
| 38.0-39.0 | 1228.8 | 83.9 | 4511.2 | 1.69 | 90.82 |
| 39.0-40.0 | 1027.3 | 71.7 | 4582.8 | 1.44 | 92.26 |
| 40.0-41.0 | 838.7 | 59.7 | 4642.6 | 1.20 | 93.46 |
| 41.0-42.0 | 670.6 | 48.7 | 4691.3 | 0.98 | 94.44 |
| 42.0-43.0 | 526.3 | 39.0 | 4730.3 | 0.78 | 95.23 |
| 43.0-44.0 | 410.4 | 31.0 | 4761.2 | 0.62 | 95.85 |
| 44.0-45.0 | 332.8 | 25.6 | 4786.8 | 0.51 | 96.37 |
| 45.0-46.0 | 279.5 | 21.9 | 4808.7 | 0.44 | 96.81 |
| 46.0-47.0 | 234.9 | 18.7 | 4827.4 | 0.38 | 97.18 |
| 47.0-48.0 | 200.5 | 16.2 | 4843.6 | 0.33 | 97.51 |
| 48.0-49.0 | 174.8 | 14.4 | 4857.9 | 0.29 | 97.80 |
| 49.0-50.0 | 155.2 | 12.9 | 4870.9 | 0.26 | 98.06 |
| 50.0-51.0 | 138.0 | 11.7 | 4882.5 | 0.24 | 98.29 |
| 51.0-52.0 | 121.8 | 10.5 | 4893.0 | 0.21 | 98.50 |
| 52.0-53.0 | 107.4 | 9.3 | 4902.4 | 0.19 | 98.69 |
| 53.0-54.0 | 95.1 | 8.4 | 4910.7 | 0.17 | 98.86 |
| 54.0-55.0 | 84.3 | 7.5 | 4918.3 | 0.15 | 99.01 |
| 55.0-56.0 | 74.1 | 6.7 | 4925.0 | 0.13 | 99.15 |
| 56.0-57.0 | 64.9 | 5.9 | 4930.9 | 0.12 | 99.27 |
| 57.0-58.0 | 57.2 | 5.3 | 4936.2 | 0.11 | 99.37 |
| 58.0-59.0 | 50.9 | 4.8 | 4940.9 | 0.10 | 99.47 |
| 59.0-60.0 | 44.6 | 4.2 | 4945.2 | 0.08 | 99.55 |
| 60.0-61.0 | 39.0 | 3.7 | 4948.9 | 0.07 | 99.63 |
| 61.0-62.0 | 34.4 | 3.3 | 4952.2 | 0.07 | 99.70 |
| 62.0-63.0 | 29.5 | 2.9 | 4955.1 | 0.06 | 99.75 |
| 63.0-64.0 | 25.3 | 2.5 | 4957.5 | 0.05 | 99.80 |
| 64.0-65.0 | 22.1 | 2.2 | 4959.7 | 0.04 | 99.85 |
| 65.0-66.0 | 18.3 | 1.8 | 4961.6 | 0.04 | 99.88 |
| 66.0-67.0 | 14.4 | 1.4 | 4963.0 | 0.03 | 99.91 |
| 67.0-68.0 | 11.6 | 1.2 | 4964.2 | 0.02 | 99.94 |
| 68.0-69.0 | 9.8 | 1.0 | 4965.2 | 0.02 | 99.96 |
| 69.0-70.0 | 8.1 | 0.8 | 4966.0 | 0.02 | 99.97 |
| 70.0-71.0 | 6.0 | 0.6 | 4966.6 | 0.01 | 99.99 |
| 71.0-72.0 | 4.2 | 0.4 | 4967.1 | 0.01 | 99.99 |

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Candlepower Table

Unit: cd

| G\C | C0.0 | C180.0 | | | | | | | | |
|-------|--------|--------|--|--|--|--|--|--|--|--|
| G0.0 | 4552.8 | 4552.8 | | | | | | | | |
| G1.0 | 4544.3 | 4564.0 | | | | | | | | |
| G2.0 | 4528.9 | 4572.4 | | | | | | | | |
| G3.0 | 4514.8 | 4580.8 | | | | | | | | |
| G4.0 | 4498.0 | 4587.9 | | | | | | | | |
| G5.0 | 4485.3 | 4592.1 | | | | | | | | |
| G6.0 | 4472.7 | 4597.7 | | | | | | | | |
| G7.0 | 4457.3 | 4599.1 | | | | | | | | |
| G8.0 | 4443.2 | 4599.1 | | | | | | | | |
| G9.0 | 4427.8 | 4596.3 | | | | | | | | |
| G10.0 | 4408.1 | 4587.9 | | | | | | | | |
| G11.0 | 4388.5 | 4578.0 | | | | | | | | |
| G12.0 | 4364.6 | 4569.6 | | | | | | | | |
| G13.0 | 4340.7 | 4548.5 | | | | | | | | |
| G14.0 | 4314.0 | 4528.9 | | | | | | | | |
| G15.0 | 4283.1 | 4498.0 | | | | | | | | |
| G16.0 | 4245.2 | 4465.7 | | | | | | | | |
| G17.0 | 4203.1 | 4425.0 | | | | | | | | |
| G18.0 | 4151.1 | 4378.6 | | | | | | | | |
| G19.0 | 4100.6 | 4323.9 | | | | | | | | |
| G20.0 | 4040.2 | 4262.1 | | | | | | | | |
| G21.0 | 3972.8 | 4190.4 | | | | | | | | |
| G22.0 | 3899.8 | 4109.0 | | | | | | | | |
| G23.0 | 3821.1 | 4014.9 | | | | | | | | |
| G24.0 | 3731.2 | 3913.8 | | | | | | | | |
| G25.0 | 3638.6 | 3794.4 | | | | | | | | |
| G26.0 | 3529.0 | 3670.9 | | | | | | | | |
| G27.0 | 3416.7 | 3540.3 | | | | | | | | |
| G28.0 | 3301.5 | 3404.0 | | | | | | | | |
| G29.0 | 3182.1 | 3258.0 | | | | | | | | |
| G30.0 | 3055.8 | 3090.9 | | | | | | | | |
| G31.0 | 2894.3 | 2880.2 | | | | | | | | |
| G32.0 | 2697.7 | 2656.9 | | | | | | | | |
| G33.0 | 2487.0 | 2422.4 | | | | | | | | |
| G34.0 | 2270.8 | 2186.5 | | | | | | | | |
| G35.0 | 2046.1 | 1949.2 | | | | | | | | |
| G36.0 | 1827.0 | 1718.9 | | | | | | | | |

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0

Test Device: CHL-6E

Distance: 2.905 m

Humidity:

Inspector:

Candlepower Table (Continue 1)

Unit: cd

| G\C | C0.0 | C180.0 | | | | | | | | |
|-------|--------|--------|--|--|--|--|--|--|--|--|
| G37.0 | 1607.9 | 1488.6 | | | | | | | | |
| G38.0 | 1395.9 | 1269.5 | | | | | | | | |
| G39.0 | 1186.6 | 1063.1 | | | | | | | | |
| G40.0 | 992.8 | 866.5 | | | | | | | | |
| G41.0 | 808.9 | 686.7 | | | | | | | | |
| G42.0 | 650.2 | 536.4 | | | | | | | | |
| G43.0 | 508.4 | 410.1 | | | | | | | | |
| G44.0 | 397.4 | 325.8 | | | | | | | | |
| G45.0 | 331.4 | 276.6 | | | | | | | | |
| G46.0 | 285.1 | 224.7 | | | | | | | | |
| G47.0 | 238.7 | 191.0 | | | | | | | | |
| G48.0 | 206.4 | 165.7 | | | | | | | | |
| G49.0 | 182.6 | 144.6 | | | | | | | | |
| G50.0 | 167.1 | 126.4 | | | | | | | | |
| G51.0 | 146.1 | 112.3 | | | | | | | | |
| G52.0 | 129.2 | 99.7 | | | | | | | | |
| G53.0 | 115.2 | 85.7 | | | | | | | | |
| G54.0 | 102.5 | 77.2 | | | | | | | | |
| G55.0 | 91.3 | 66.0 | | | | | | | | |
| G56.0 | 82.8 | 56.2 | | | | | | | | |
| G57.0 | 70.2 | 50.5 | | | | | | | | |
| G58.0 | 64.6 | 43.5 | | | | | | | | |
| G59.0 | 56.2 | 39.3 | | | | | | | | |
| G60.0 | 50.5 | 32.3 | | | | | | | | |
| G61.0 | 44.9 | 28.1 | | | | | | | | |
| G62.0 | 39.3 | 25.3 | | | | | | | | |
| G63.0 | 32.3 | 21.1 | | | | | | | | |
| G64.0 | 29.5 | 18.3 | | | | | | | | |
| G65.0 | 25.3 | 15.4 | | | | | | | | |
| G66.0 | 21.1 | 11.2 | | | | | | | | |
| G67.0 | 15.4 | 9.8 | | | | | | | | |
| G68.0 | 14.0 | 7.0 | | | | | | | | |
| G69.0 | 11.2 | 7.0 | | | | | | | | |
| G70.0 | 9.8 | 4.2 | | | | | | | | |
| G71.0 | 7.0 | 2.8 | | | | | | | | |
| G72.0 | 4.2 | 2.8 | | | | | | | | |
| G73.0 | 1.4 | 0.0 | | | | | | | | |

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Unit: cd

[illegible]

Inspector: